



SMT BURNERS

The Carlisle SMT, or Surface Mixed Tube, Ribbon Burners are designed for maximum safety, durability, and performance. The SMT is a totally surfaced mixed burner, and thus has virtually no possibility of flashback. These burners may be used with a mixture of oxygen and either natural gas, propane, or even hydrogen. The SMT maintains a very hot sharp fire with a continuously even flame in any position, therefore eliminating any cold spots. These burners can operate at extremely high velocities and yet can be pulled back to an almost invisible flame.

The SMT is manufactured from stainless steel with the porting itself consisting of monel hypotubes. The SMT can be made in flame lengths as small as a 1/2" to as large as 13". It is important to note that flame space does not reflect the burner's overall length.

SMT's are available in four different styles for ease of use. These styles are depicted on the lower right hand corner of this bulletin. Both style "A" and "C" are for machine mounting. They are available with the optional Machined steel clamp to facilitate their mounting to any machine. Style "B" Complete is used for bench work and comes with a set of red and green handled valves. The Style "B" is also fitted into a machined steel case and bench stand. The Style "BC" is identical to the Style "B" with the exception that the two valves are located on the same side of the burner, resembling the feed tube setup of the Style "C" SMT.

HOW TO ORDER

MODEL NUMBER


FLAME SPACE

1 1 A 0 0 0 - 0 0 . 0 0

Flame Space:
The distance from the beginning to the end of the porting from which the flame originates.

Example: A 4-1/2" SMT burner style "A" with a case would be: 1 1 A 0 2 6 - 0 4 5 0

FLAME SPACE	MODEL NUMBERS						BODY PIPE SIZE	THREAD SIZE
	STYLE "A" W/O CASE	STYLE "A" W/ CASE	STYLE "B" COMPLETE	STYLE "C" W/O CASE	STYLE "C" W/ CASE	STYLE		
.5" to 1.49"	01	02	03	04	05	06	3/8"	1/8" NPT
1.5" to 2.49"	07	08	09	10	11	12	3/8"	1/8" NPT
2.5" to 3.49"	13	14	15	16	17	18	3/8"	1/8" NPT
3.5" to 4.49"	19	20	21	22	23	24	3/8"	1/8" NPT
4.5" to 5.49"	25	26	27	28	29	30	3/8"	1/8" NPT
5.5" to 6.49"	31	32	33	34	35	36	3/4"	1/4" NPT
6.5" to 7.49"	37	38	39	40	41	42	3/4"	1/4" NPT
7.5" to 9.49"	43	44	45	46	47	48	3/4"	1/4" NPT
9.5" to 13"	49	50	51	52	53	54	3/4"	1/4" NPT

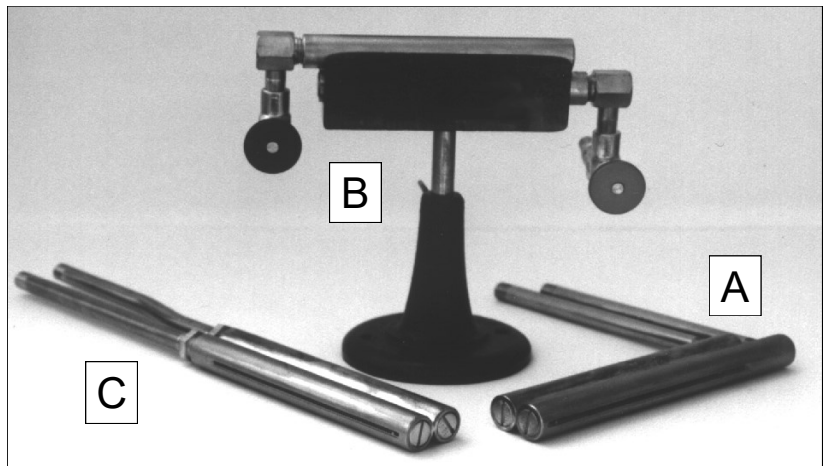

Carlisle Machine Works, Inc.,
P.O. Box 746, 412 S. Wade Blvd., Bldg. #5, Millville, NJ 08332
Phone: (856) 825 - 0627 Fax: (856) 825 - 5510
Web Site: www.carlislemachine.com E-Mail: carlisle@carlislemachine.com
Toll Free In Continental US (800) 922-1167